

Declaration of Performance



Reference No PSL 2


ACP(Concrete) Ltd,
Risehow Industrial Estate, Flimby, Maryport,
Cumbria, CA15 8PD

13

EN 845-2

ACP lintel 100 x 150x [600, 900, 1050, 1200,
1350, 1500, 1800, 2100, 2400, 2700, 3000, 3300]
to be used in walls and partitions

Loadbearing capacity	See table on website
Deflection	3.2mm at 3kN
Water Absorption	NPD
Water Vapour Permeability	NPD
Mass	0.35 kN/m
Thermal resistance	0.52 W/(m.K)
Resistance to Fire	1 hour
Durability	C2
Durability against freeze/thaw	Resistant
Dangerous substance	Not applicable

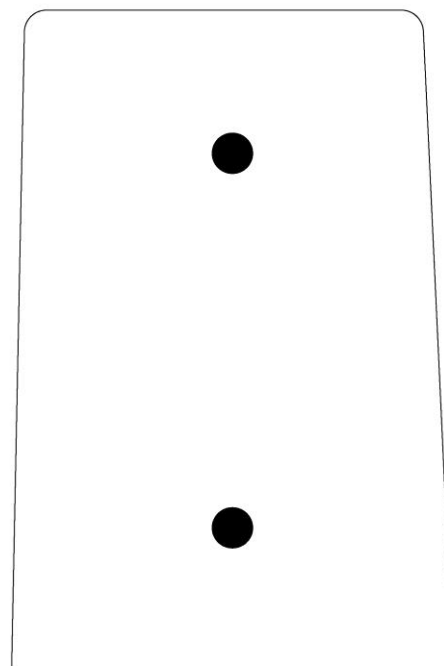

The performance of this Product complies with the Design and Harmonised Codes applicable to that product. The relevant code, performance criteria and factory identifier are shown. The design drawings and calculation detail the design codes and physical dimensions of the product.

The continuous surveillance, assessment and evaluation of the Factory Production control is declared as compliant for all products of this type.

W Mercer Managing Director 11/03/16