

## Declaration of Performance



Reference No PSL 2a

ACP(Concrete) Ltd,  
Risehow Industrial Estate, Flimby, Maryport,  
Cumbria, CA15 8PD

13

EN 845-2

**ACP lintel 150x 100x** [600, 900, 1050, 1200,  
1350, 1500, 1800, 2100, 2400, 2700, 3000, 3300]  
to be used in walls and partitions

Loadbearing capacity	See table on website
----------------------	----------------------

Deflection	3.2mm at 3kN
------------	--------------

Water Absorption	NPD
------------------	-----

Water Vapour Permeability	NPD
---------------------------	-----

Mass	0.35 kN/m
------	-----------


Thermal resistance	0.52 W/(m.K)
--------------------	--------------

Resistance to Fire	1 hour
--------------------	--------

Durability	C2
------------	----

Durability against freeze/thaw	Resistant
--------------------------------	-----------

Dangerous substance	Not applicable
---------------------	----------------

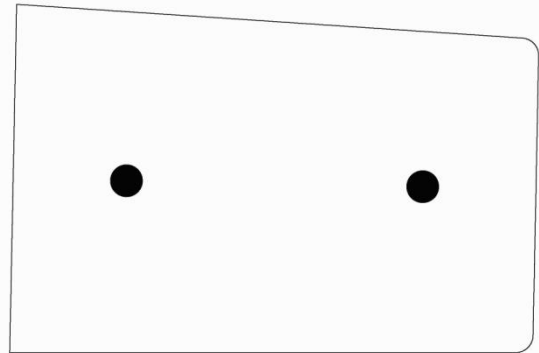

The performance of this Product complies with the Design and Harmonised Codes applicable to that product. The relevant code, performance criteria and factory identifier are shown. The design drawings and calculation detail the design codes and physical dimensions of the product.

The continuous surveillance, assessment and evaluation of the Factory Production control is declared as compliant for all products of this type.

W Mercer Managing Director 11/03/16